


# Sparks Racing Air Super Charger Kit

## LTZ/KFX/DVX 400

### Installation tips

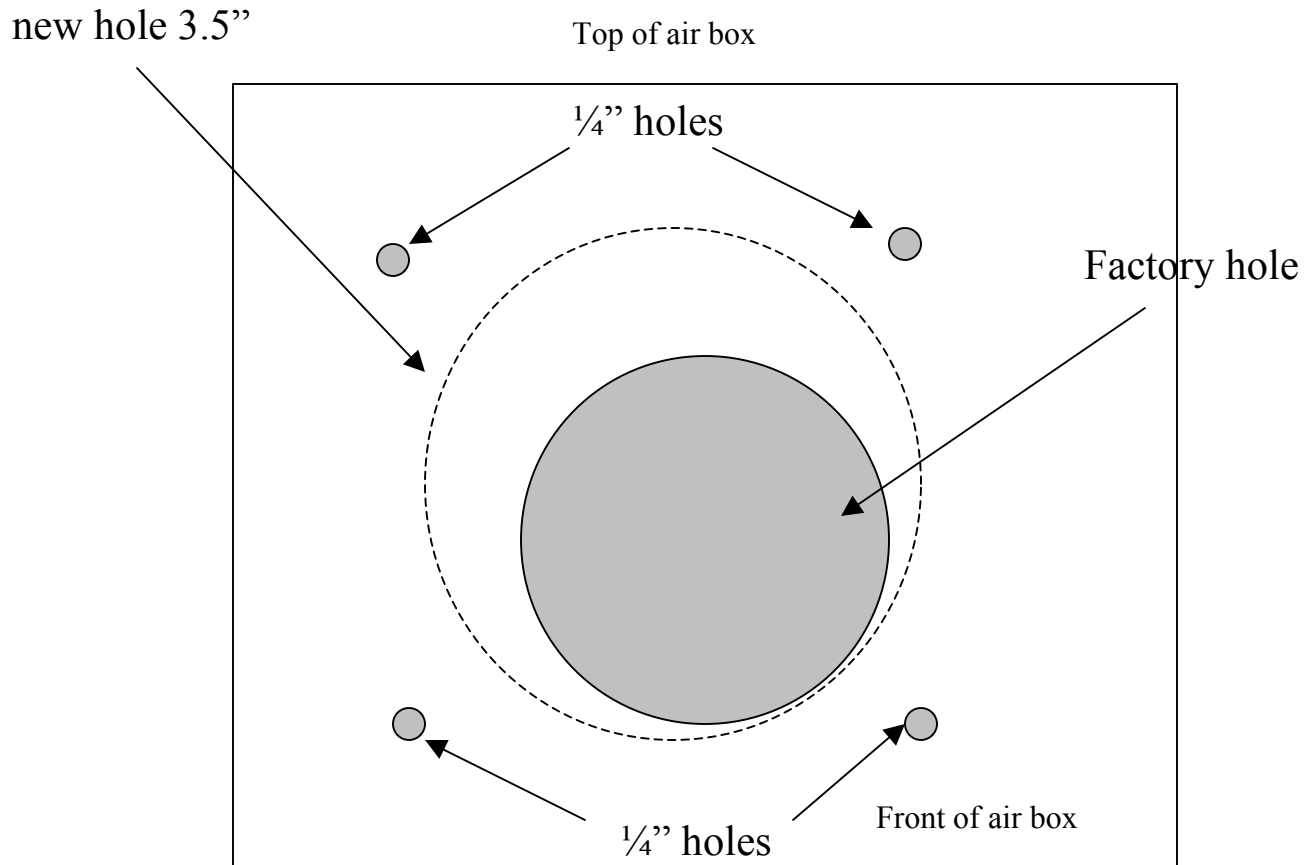


- Simply remove the air box from the quad and take the stock filter out of the box.
- With a 3.5" hole saw, cut a new hole and locate it as it shows in the above drawing.
- Chamfer the edge of the new hole.
- Put the Air Supercharger in place and mark the screw holes.
- Remove the Super Charger ring and drill 1/4" holes in those spots.
- The Sparks Racing logo face the front on the quad and is visible from the front of the box.

# Sparks Racing Air Super Charger Kit

## LTZ/KFX/DVX 400

### Installation tips

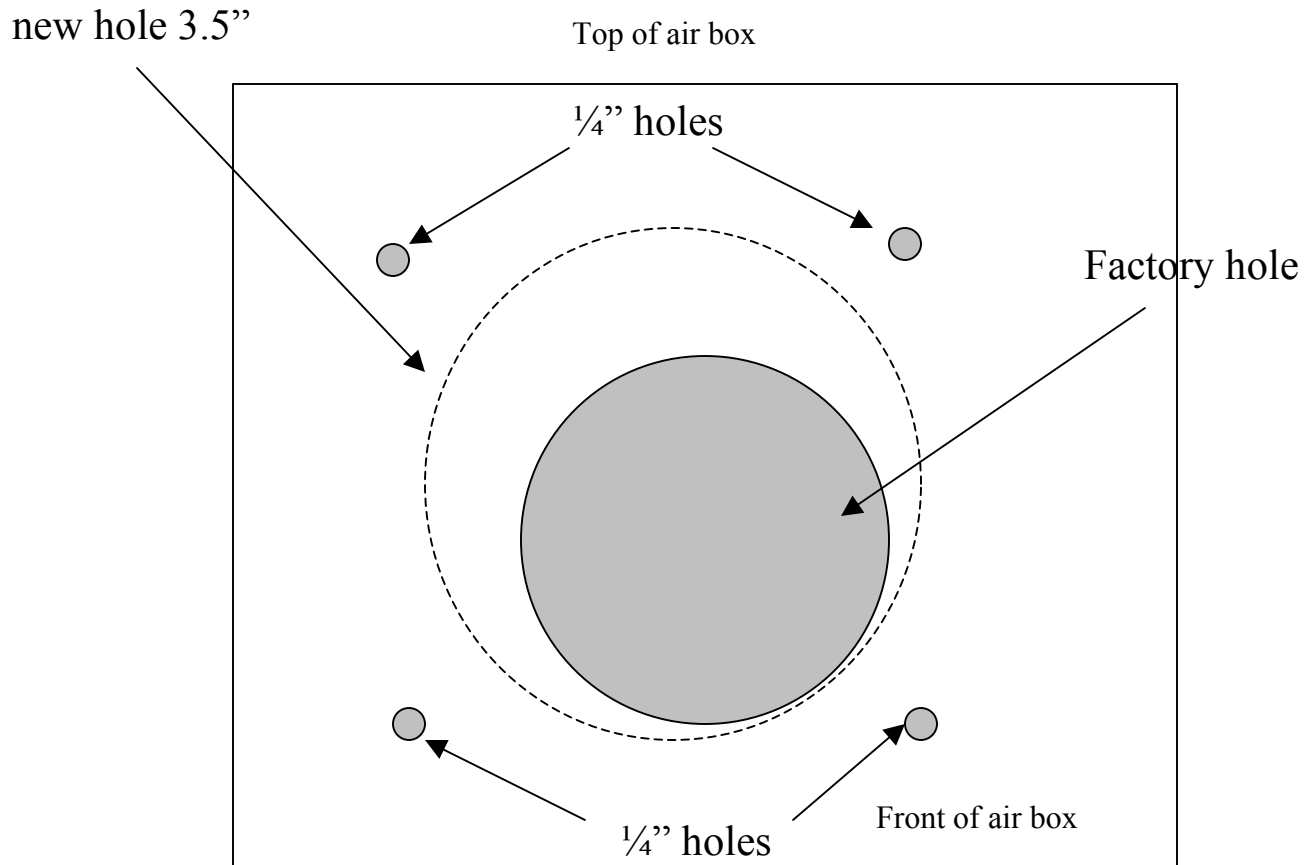

- Simply remove the air box from the quad and take the stock filter out of the box.
- With a 3.5'' hole saw, cut a new hole and locate it as it shows in the above drawing.
- Chamfer the edge of the new hole.
- Put the Air Supercharger in place and mark the screw holes.
- Remove the Super Charger ring and drill 1/4'' holes in those spots.
- The Sparks Racing logo face the front on the quad and is visible from the front of the box.